

# METERING VALVES

Metering valves are automatic shut-off valves for public venues ensuring water saving.



SEDAL GROUP  
Polígono Industrial Can Sunyer · C/Química, 2-12  
E-08740 Sant Andreu de la Barca (Barcelona) · Spain  
Tel. +34 93 680 33 00 · Fax +34 93 680 33 03  
sedal@sedal.com · www.sedal.com




Get access to the complete and latest product technical data!



# METERING VALVES

## Metering valves

Metering valves are automatic shut-off valves for public venues ensuring water saving. All metering valves are available in M26 and M28 and have an auto-cleaning system to avoid lime scale.

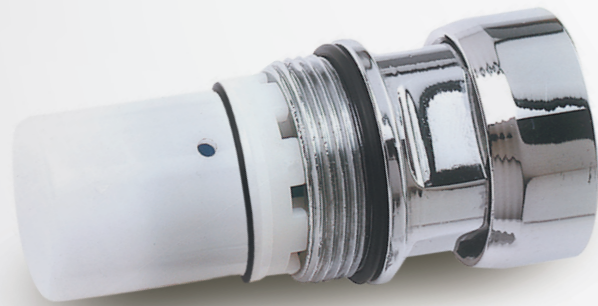

## Features



**ECO**  
Environmental sustainability feature.



**AUTOMATIC SHUT-OFF**  
Shuts off automatically after a limited period of time.



**AUTO-CLEANING**  
Auto-cleaning system to avoid lime scale.

## RECOMMENDED APPLICATIONS



**SHOWERS**  
Recommended for public showers.



**WASHBASINS**  
Specially designed for public basins.



**URINALS**  
Recommended for public urinaries.



**PUBLIC VENUES**  
Suitable for airports, schools, libraries, etc.



**HOTELS**  
Recommended for hotels.

METERING VALVES FOR SHOWERS

M26  
M28

METERING VALVES FOR BASINS


M26  
M28

METERING VALVES FOR URINALS

M26  
M28

## Adjustable metering valves

Metering valves with automatic shut-off. The user can limit the time of use of the self-closing valve thanks to an adjustable system.

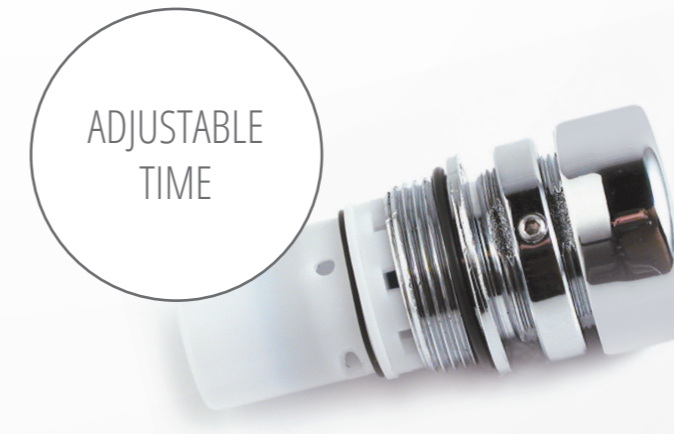

## Features



**ECO**  
Environmental sustainability feature.



**ADJUSTABLE**  
The user can limit the time of use of metering valve.



**AUTOMATIC SHUT-OFF**  
Shuts off automatically after a limited period of time.


## RECOMMENDED APPLICATIONS



**SHOWERS**  
Recommended for public showers.



**WASHBASINS**  
Specially designed for public basins.



**URINALS**  
Recommended for public urinaries.



**PUBLIC VENUES**  
Suitable for airports, schools, libraries, etc.



**HOTELS**  
Recommended for hotels.

ADJUSTABLE METERING VALVES FOR TAPS, SHOWERS & URINARY

M26  
M28

# TECHNICAL SPECIFICATIONS

SPECIFICATION	SHOWER	BASIN	URINAL
Max. working pressure	6 bar	6 bar	6 bar
Burst pressure	>25 bar	>25 bar	>25 bar
Lyfe cycle EN-816	210.000	210.000	210.000
<b>Flow rate at 3 bar</b>			
Free flow (DN13 hose)	17 l/min	17 l/min	17 l/min
C-Restrictor (DN13 hose)	14.5 l/min	14.5 l/min	14.5 l/min
Actuation time	20 <sup>+10</sup> / <sub>-5</sub> s	15 ± 5 s	7 ± 3 s

# TECHNICAL SPECIFICATIONS

SPECIFICATION	ADJUSTABLE
Max. working pressure	6 bar
Burst pressure	>25 bar
Lyfe cycle EN-816	210.000
<b>Flow rate at 3 bar</b>	
Free flow (DN13 hose)	17 l/min
C-Restrictor (DN13 hose)	14.5 l/min
Actuation time	30 ± 10 s