

TM-002

恒温阀芯

型号

07TM0203		ASSE-1016
07TM0204		EN-1111
07TM0205		QB / T 5418
07TM0210 DWD		NF077-04 C1
07TM0211 DWD		NF077-04 C3
07TM0212 DWD		EN-1111

技术参数⁽¹⁾

爆破水压	>35 bar / 1 min	
寿命测试	EN 1111 (x2)	100.000 cycles
	ASSE 1016	100.000 cycles
	QB/T 5418	30.000 cycles
最高热水温度	90°C	
限温环最大限制角度 (由38°C至全冷、全热)	±170° angle	
噪音水平 (EN1111)	Class I	

操作力矩

转 左-右 Max 0,5 Nm


敏感度(36-40 °C) (把手 R 20 mm) 19 mm

冷水失效安全性测试 切断


自由流量 38.1 l/min at 3 bar



流量⁽¹⁾



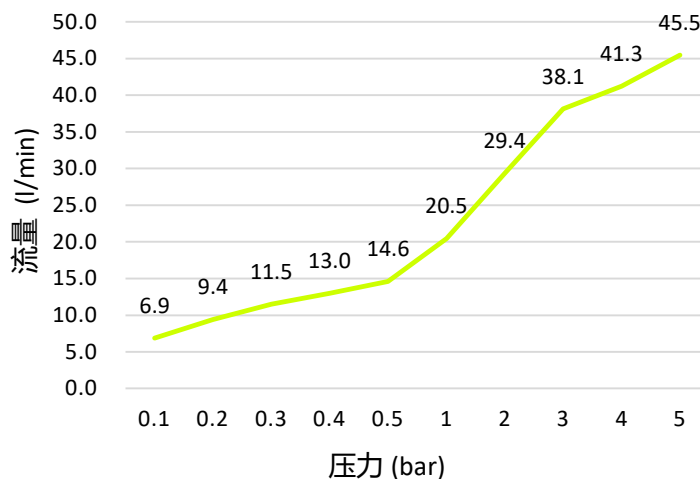


敏感度⁽¹⁾

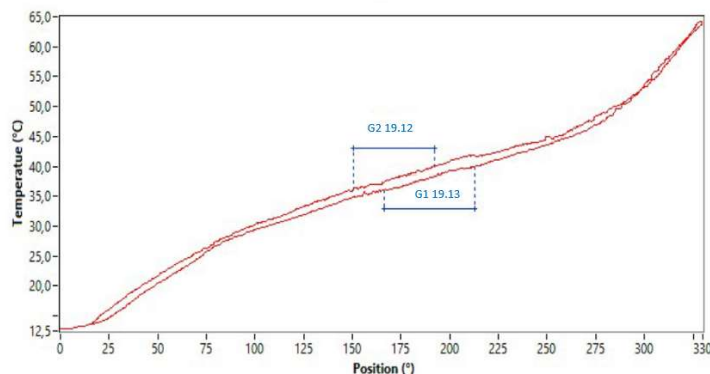

(1) 由赛道龙头测试


- 安装时需配备止回阀，以防止介质回流。
- 建议在混水阀上游的液压管路中安装80目规格的过滤器。

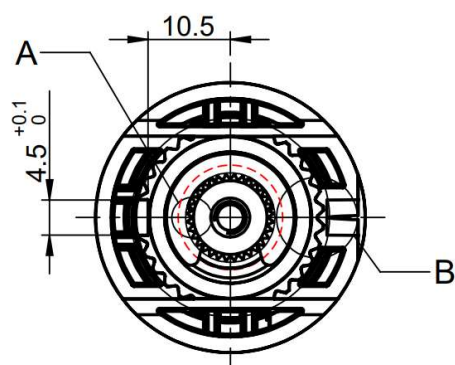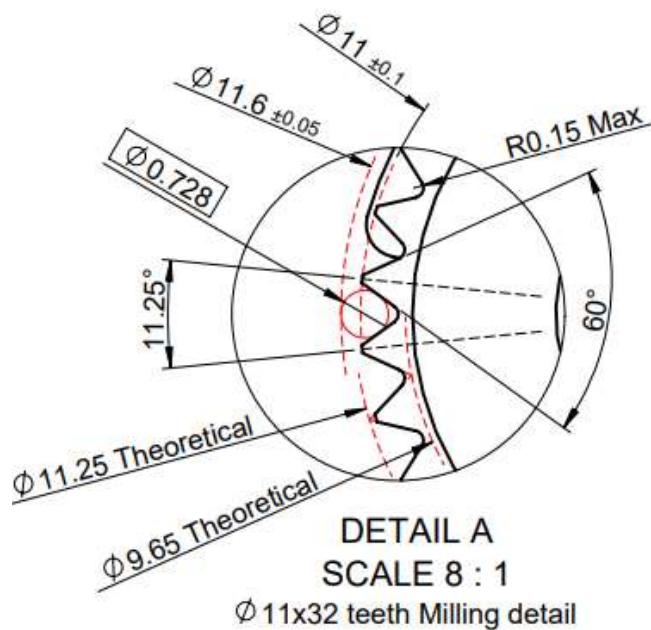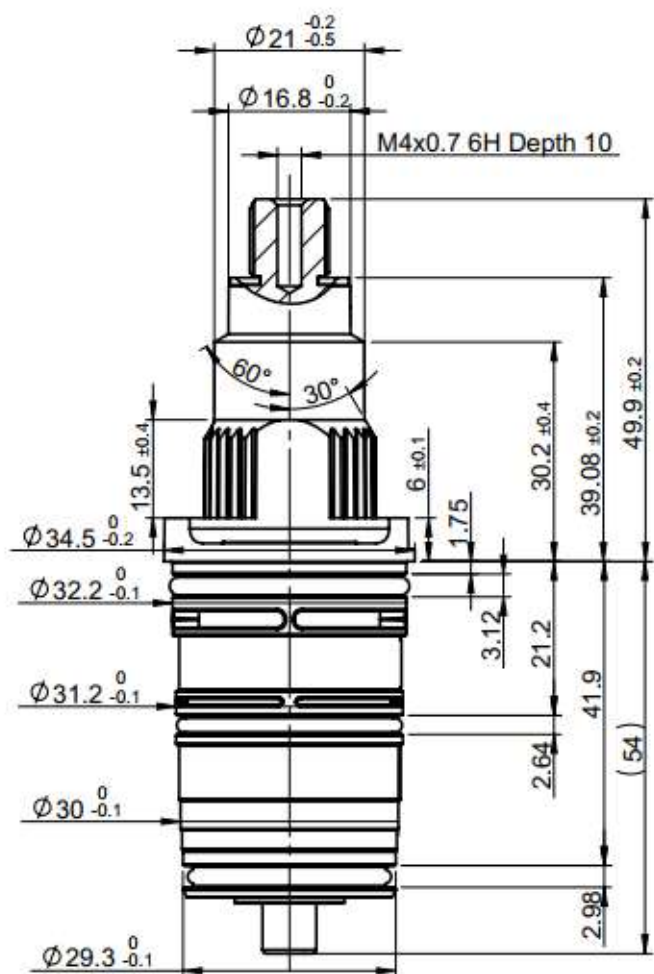

Rectilinear denticulation 24x31
following NF E 22-151
Module $m=0.75$ N=31 teeth

DETAIL B
SCALE 2 : 1

加工指引⁽²⁾

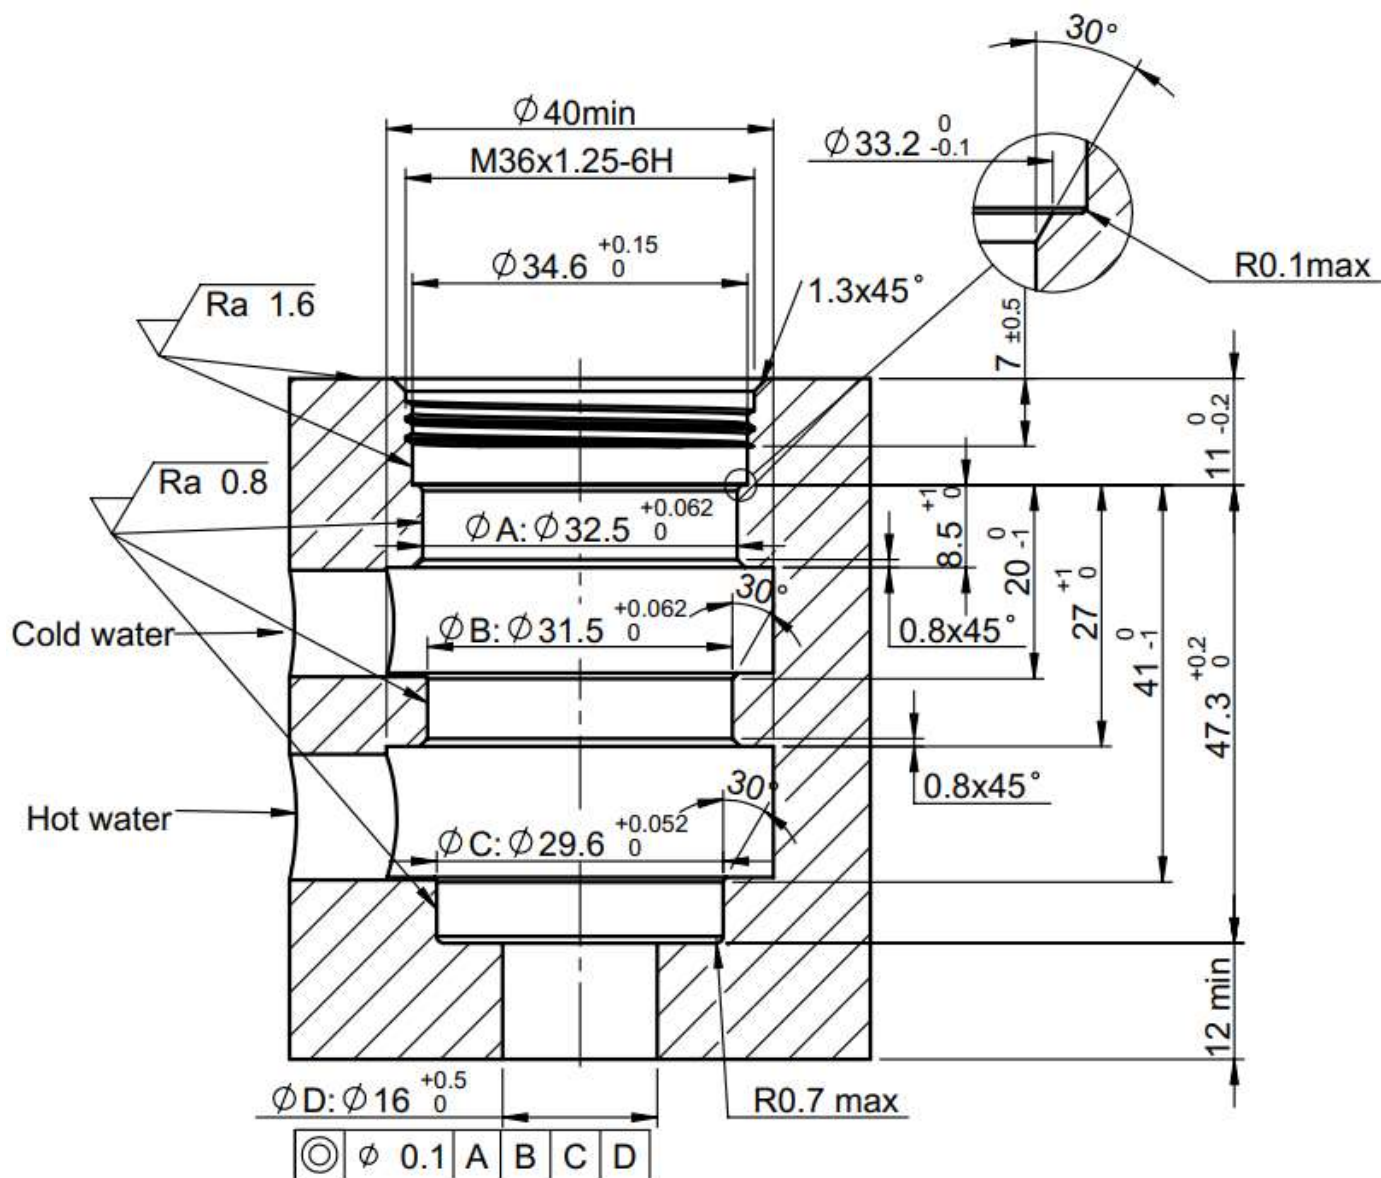

(2) 龙头表面无杂物，密封表面无毛刺、无尖锐区域；