

DIVERTER GD4-40 S/D


40 mm 4 positions Diverter
08GD40S0001



Technical specifications

Nut torque/Pitch M1,5	10÷12 Nm
Angle between positions	90° (4 positions)
Rotation angle	360° (full rotation)
Working pressure (recommended)	1÷5 bar
Burst pressure	>35 bar
Life cycle NF 077 EN 817	30,000 cycles 30,000 cycles
Recommended hot water temp. according standards	60°C÷65°C
Max. Hot water temperatura	90°C
Flow rate at 3 bar⁽¹⁾	
Free flow	28,9 l/min
A-Restrictor	17,3 l/min
Operation torque at 3 bar	
Turning between positions	0,15÷0,45 Nm
Positioning click	0,35÷0,60Nm

Flow Rates⁽¹⁾




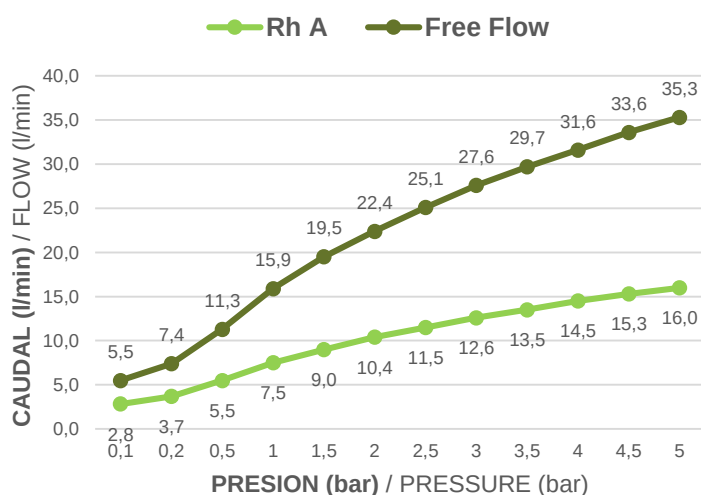


⁽¹⁾ Measured with Sedal's faucet

GD4-40 S/D

40 mm 4 positions Diverter

Technical dimensions²

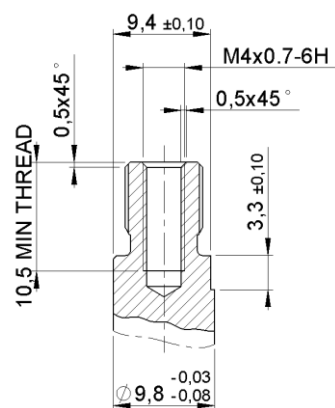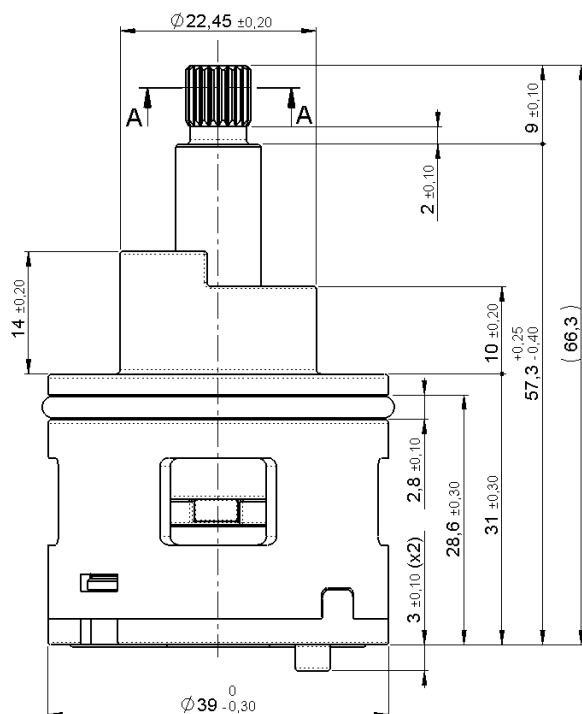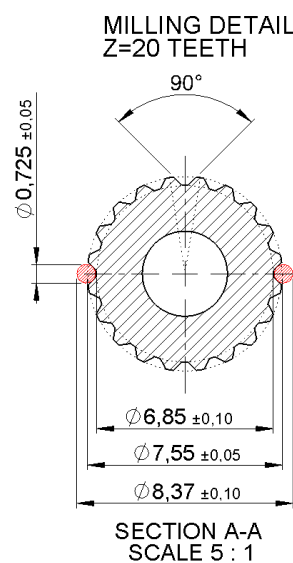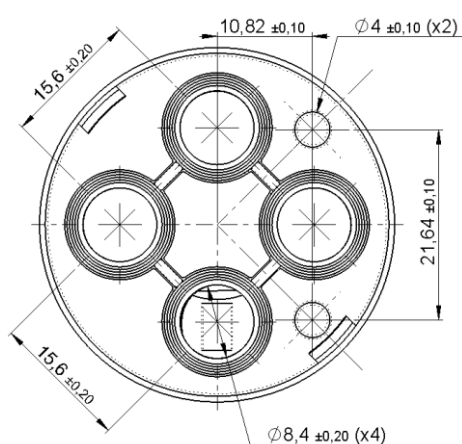


²) Dimensions of the cartridge assembled into the faucet (without vertical gap between the cover and the base)

GD4-40 S/D

40 mm 4 positions Diverter

Machining prescription⁽³⁾

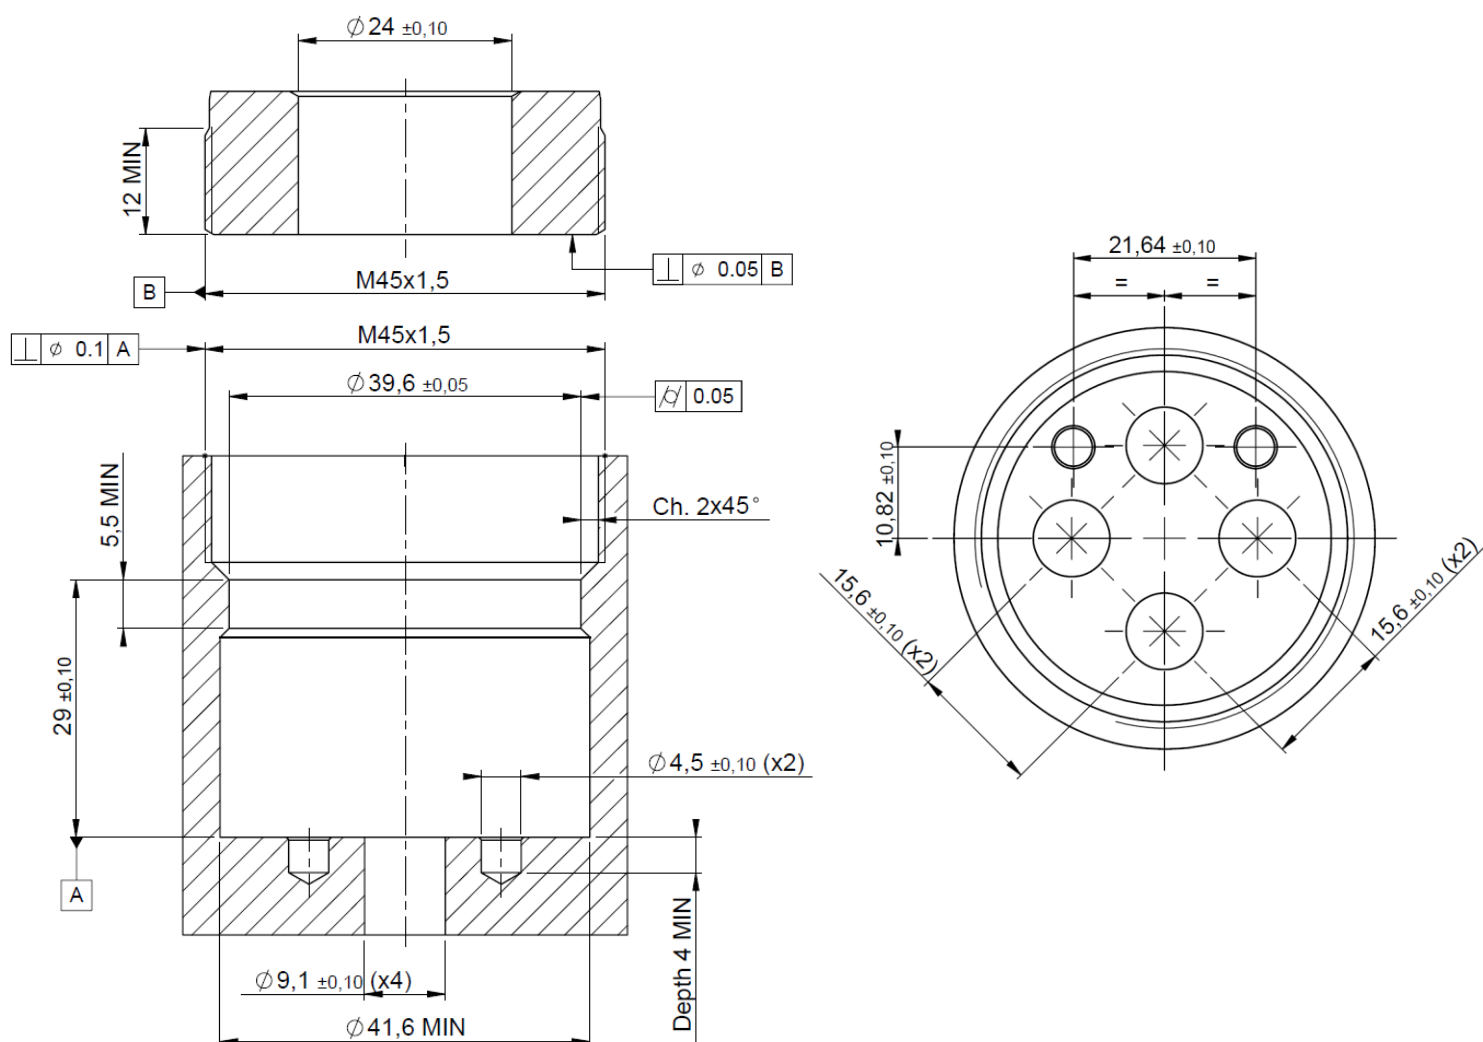

⁽³⁾ Sedal testing device