

SN-40 C/D THEDRA TRN COLD


Single lever cartridge Standard 40 mm
08SN40L4001



Technical specifications


Prescribed tightening torque ⁽¹⁾	10-12 Nm
Opening angle	25°
Rotation angle	110°
Working pressure (recommended)	1 - 5 bar
Burst pressure	>50 bar
Life cycle	EN-817 NF U3 (x2) ASME 112.18.1 M (x2) GB18145
	175,000 cycles 1,000,000 cycles 140,000 cycles
Sensitivity (Handle r>57mm) ⁽²⁾	>10 mm
Fidelity ⁽²⁾	< 3°C
Max. Hot water recommended	60°C - 65°C
Max. Hot water	90°C
Flow rate @ 3 bar ⁽²⁾	
Free flow(Mix)	14,2 l/min
A-Restrictor(Mix)	9,7 l/min
Operation torque without water pressure	
Open - close	0,20 ÷ 0,40 Nm
Turn left-right	0,20 ÷ 0,40 Nm

Flow rate at Cold position ⁽²⁾

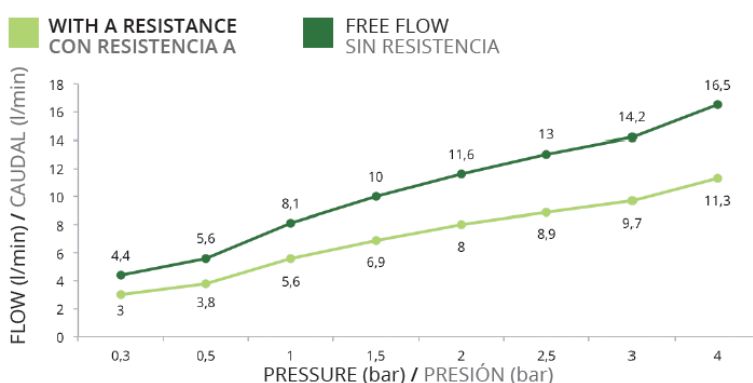

Q Cold - Handle at centered position respect to the axis of the faucet spout DN6


Sensitivity ⁽²⁾

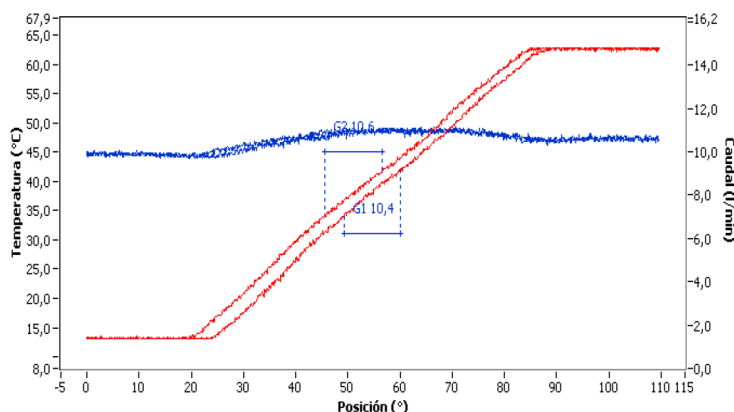

(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,5mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.

(2) Measured with SEDAL faucet.

Technical dimensions ⁽³⁾



(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris.