


SN-40 S/D THEDRA TR COLD DUE C3


40 mm single lever cartridge
08SN40S5001

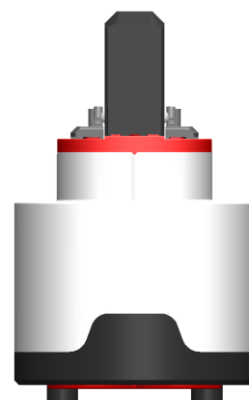

Technical specifications


Prescribed tightening torque ⁽¹⁾	10-12 N.m
Opening angle	25°
Rotation angle	110°
Working pressure (recommended)	1 - 5 bar
Burst pressure	>50 bar
Life cycle	EN-817 NF U3 (x2) ASME 112.18.1 M (x2) GB18145
	175,000 cycles 1,000,000 cycles 140,000 cycles
Sensitivity (Handle r>57mm) ⁽²⁾	>10 mm
Fidelity ⁽²⁾	< 3°C
Max. Hot water recommended	60°C - 65°C
Max. Hot water	90°C
Flow rate @ 3 bar⁽²⁾	
Free flow (Mix)	13,3 l/min
A-Restrictor (Mix)	9,4 l/min
Saving Device (DUE) according to NF EN 817	
Operation torque without water pressure	
Open - close	0,20 ÷ 0,40 Nm
Turn left-right	0,20 ÷ 0,40 Nm

Flow rate at Cold position⁽²⁾

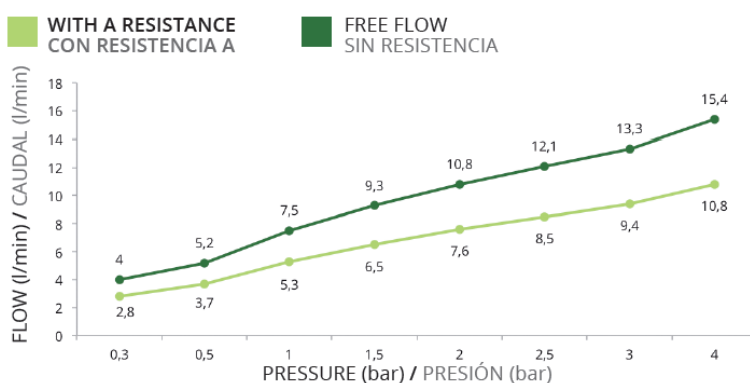

Q Cold - Handle at centered position respect to the axis of the faucet spout DN6

Sensitivity⁽²⁾

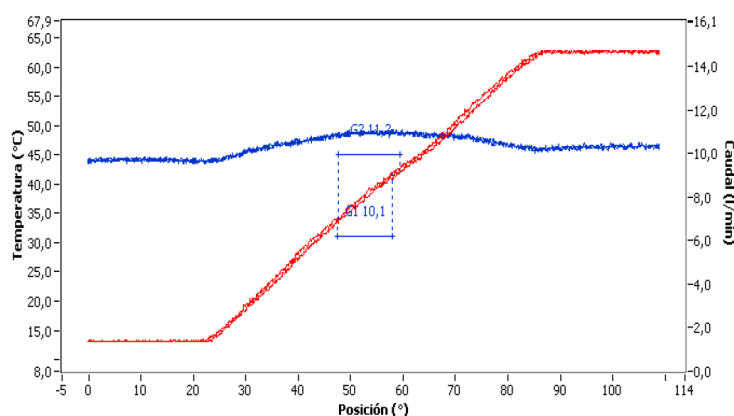

(1) The prescribed tightening torque is related to faucet body and nut both in brass material, pitch 1,5mm and no lubricant applied on the threads. For other faucet body - nut material combinations please contact SEDAL.

(2) Measured with SEDAL faucet.

[illegible]

(4) Sealing surfaces must be free of burrs and sharp areas. The faucet body must be free of debris.